


CONCEALED MAGNETIC LIGHT



Magnetic Track Channel Concealed

1 METER	₹800
2 METERS	₹1600
3 METERS	₹2400

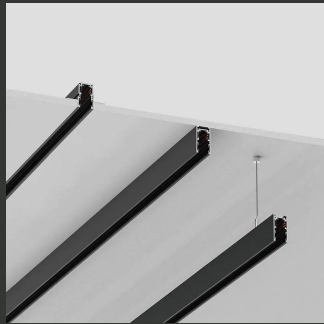

Magnetic Track Channel Multiple Use

1 METER	₹1310
2 METERS	₹2550
3 METERS	₹3790



Magnetic Linear Adjustable Spot Light

6W	₹640
12W	₹950
18W	₹1300



Magnetic Linear Diffused Light

12W	₹610
24W	₹970



Magnetic Linear Spot Light

6W	₹460
12W	₹650
18W	₹830
24W	₹1080




Magnetic Track Light

12W	₹1240
24W	₹1640



Magnetic Linear Diffused Corner L Shape Light

24W	₹1740
-----	-------

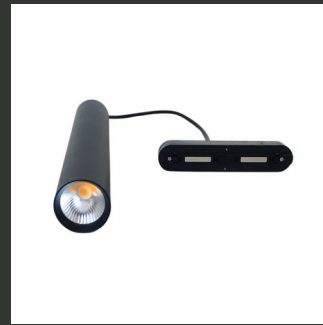

MAGNETIC HANGING LIGHT-LONG

12W	₹1390
-----	-------



MAGNETIC HANGING LIGHT-SMALL

12W	₹1220
-----	-------



CONCEALED DRIVER FOR MAGNETIC TRACK

48V 100W	₹1,199
48V 200W	₹1,199



Track Joiner Vertical Corner 90 Degree Multi

90 Degree	₹620
-----------	------



Track to Track Module 90 Degree

90 Degree	₹299
-----------	------



Module 180°

Track to Track Module
180 Degree

180 Degree ₹299



Track to Track Module
90 Degree

90 Degree ₹620



Track to Track Module
Horizontal 90 Degree

90 Degree ₹620




Track to Track Module
Horizontal 90 Degree


90 Degree ₹620

MAGNETIC TRACK PATTI

Recessed Track

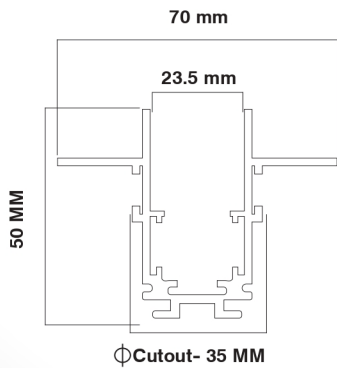


Surface Track

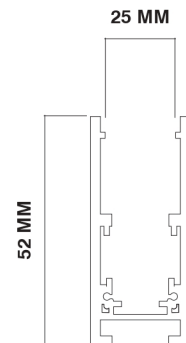


Product Code	Dimension (in mm)			
	Length	Width	Height	Cutout
SL-MTP-296-Recessed - 1 mtr	1000	70	50	∅ 35
SL-MTP-296-Recessed - 2 mtr	2000	70	50	∅ 35
SL-SMTP-297-Surface - 1 mtr	1000	25	52	
SL-SMTP-297-Surface - 2 mtr	2000	25	52	

MAGNETIC MOVABLE LASER BLADE

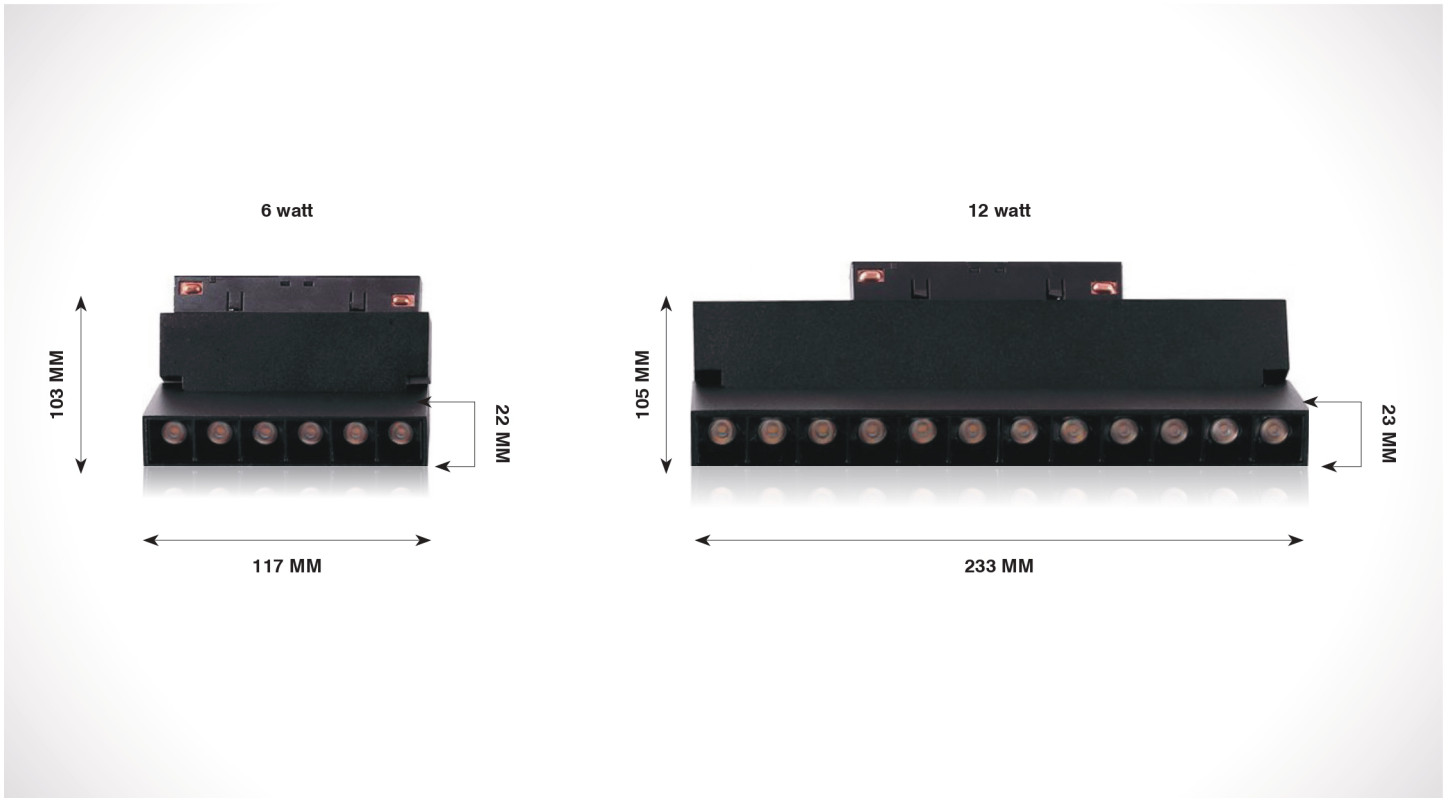


Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Length	Width	Height			Housing	LED Make
SL-MMLB-294-6w-S-W.WHT	80 / 90	3000K	117	103	22	660 lm	48V DC	Aluminium	
SL-MMLB-294-6w-S-N.WHT		4000K	117	103	22	720 lm		Bridgelux	
SL-MMLB-294-6w-S-WHT		6500K				750 lm			

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Length	Width	Height			Housing	LED Make
SL-MMLB-294-12w-S-W.WHT	80 / 90	3000K	233	105	23	1320 lm	48V DC	Aluminium	
SL-MMLB-294-12w-S-N.WHT		4000K	233	105	23	1440 lm		Bridgelux	
SL-MMLB-294-12w-S-WHT		6500K				1500 lm			

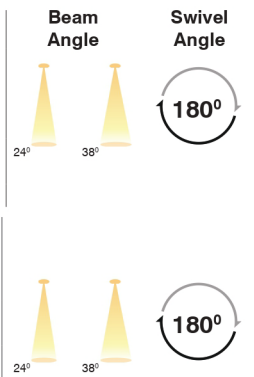

MAGNETIC LASER BLADE

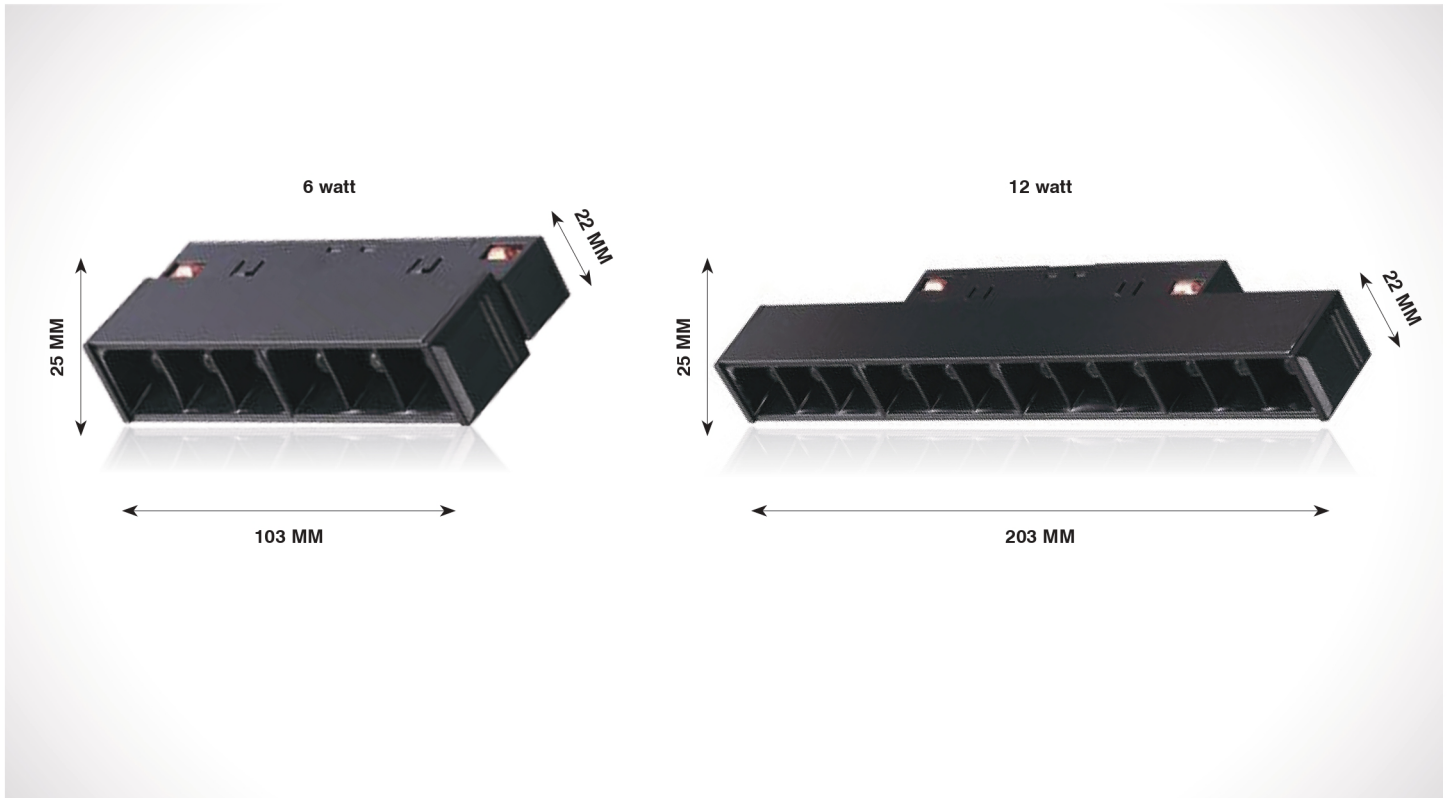


Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Length	Width	Height			Housing	LED Make
SL-MLB-291-6w-S-W.WHT	80 / 90	3000K	103	25	22	660 lm	48V DC	Aluminium	
SL-MLB-291-6w-S-N.WHT		4000K				720 lm		Bridgelux	
SL-MLB-291-6w-S-WHT		6500K				750 lm			

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Length	Width	Height			Housing	LED Make
SL-MLB-291-12w-S-W.WHT	80 / 90	3000K	203	25	22	1320 lm	48V DC	Aluminium	
SL-MLB-291-12w-S-N.WHT		4000K				1440 lm		Bridgelux	
SL-MLB-291-12w-S-WHT		6500K				1500 lm			

Beam Angle





MAGNETIC DIFFUSER LASER BLADE

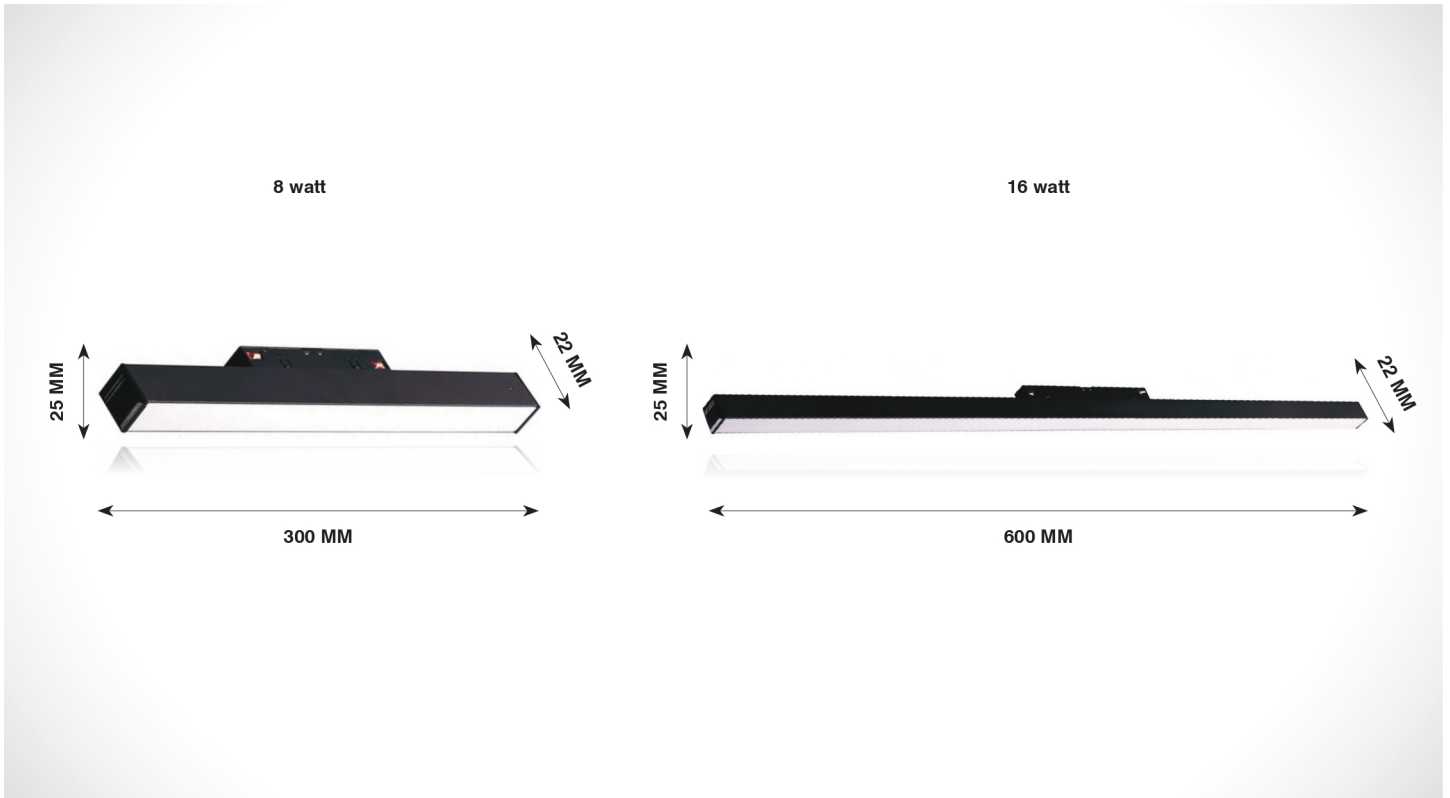


Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Length	Width	Height			Housing	LED Make
SL-MDLB-292-8w-S-W.WHT	80 / 90	3000K				880 lm	48V DC	Aluminium	
SL-MDLB-292-8w-S-N.WHT		4000K	300	25	22	960 lm		Bridgelux	
SL-MDLB-292-8w-S-WHT		6500K				1000 lm			

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Length	Width	Height			Housing	LED Make
SL-MDLB-292-16w-S-W.WHT	80 / 90	3000K				1760 lm	48V DC	Aluminium	
SL-MDLB-292-16w-S-N.WHT		4000K	600	25	22	1920 lm		Bridgelux	
SL-MDLB-292-16w-S-WHT		6500K				2000 lm			


Beam Angle




MAGNETIC TRACK SPOT

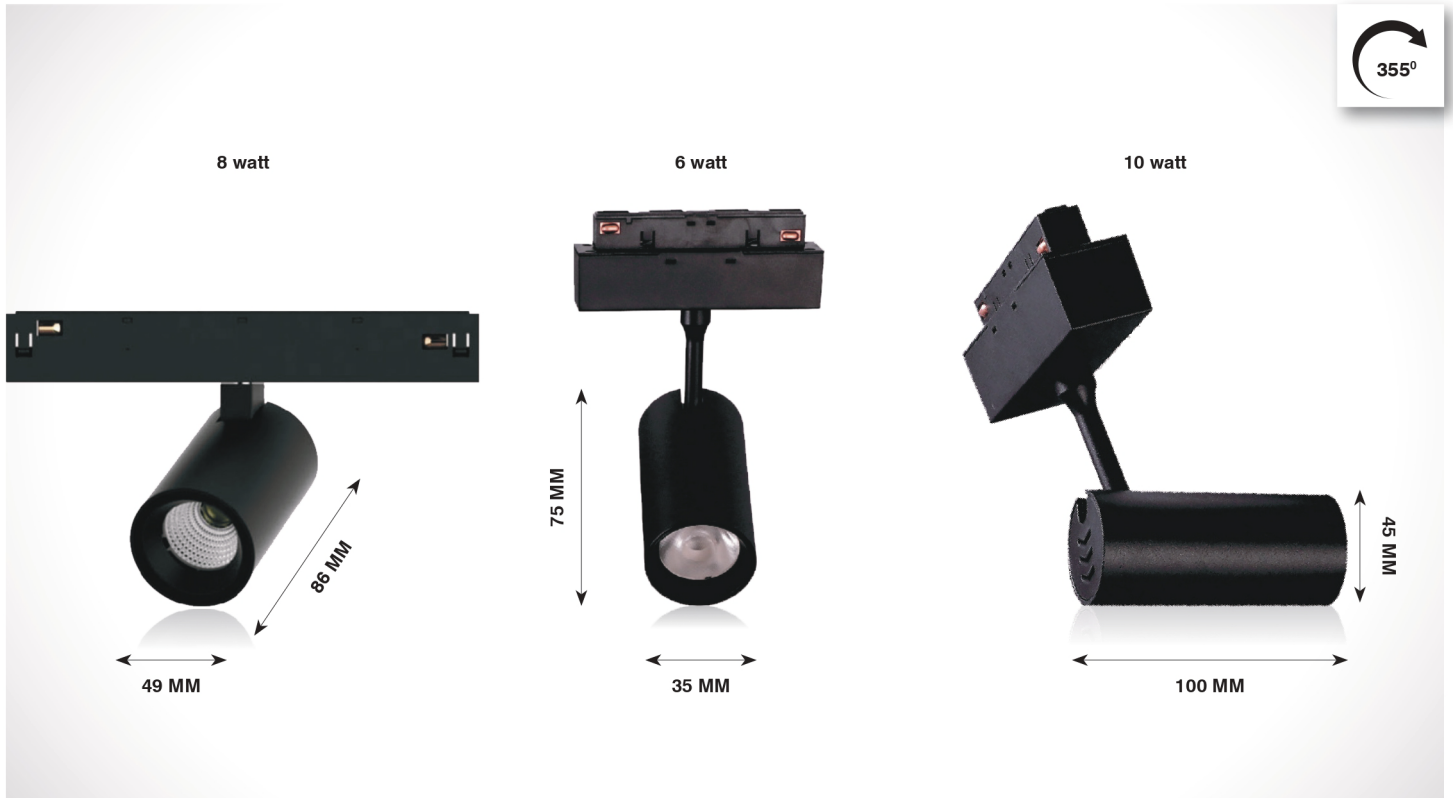


Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
SL-MTL-290-8w-R-W.WHT	80 / 90	3000K	Length	Diameter	880 lm	48V DC	Housing	Aluminium
SL-MTL-290-8w-R-N.WHT		4000K	86	49	960 lm		LED Make	Cree / Bridgelux
SL-MTL-290-8w-R-WHT		6500K			1000 lm			

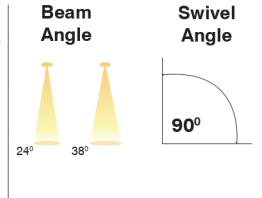


Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
SL-MTL-293-6w-R-W.WHT	80 / 90	3000K	Length	Diameter	660 lm	48V DC	Housing	Aluminium
SL-MTL-293-6w-R-N.WHT		4000K	75	35	720 lm		LED Make	Cree / Bridgelux
SL-MTL-293-6w-R-WHT		6500K			750 lm			

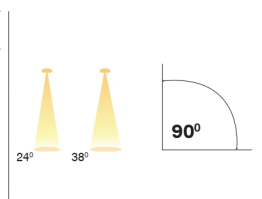


Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
SL-MTL-293-10w-R-W.WHT	80 / 90	3000K	Length	Diameter	1100 lm	48V DC	Housing	Aluminium
SL-MTL-293-10w-R-N.WHT		4000K	100	45	1200 lm		LED Make	Cree / Bridgelux
SL-MTL-293-10w-R-WHT		6500K			1250 lm			

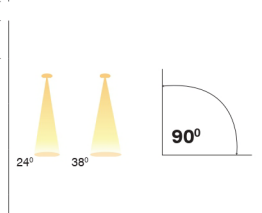


MAGNETIC TRACK SPOT

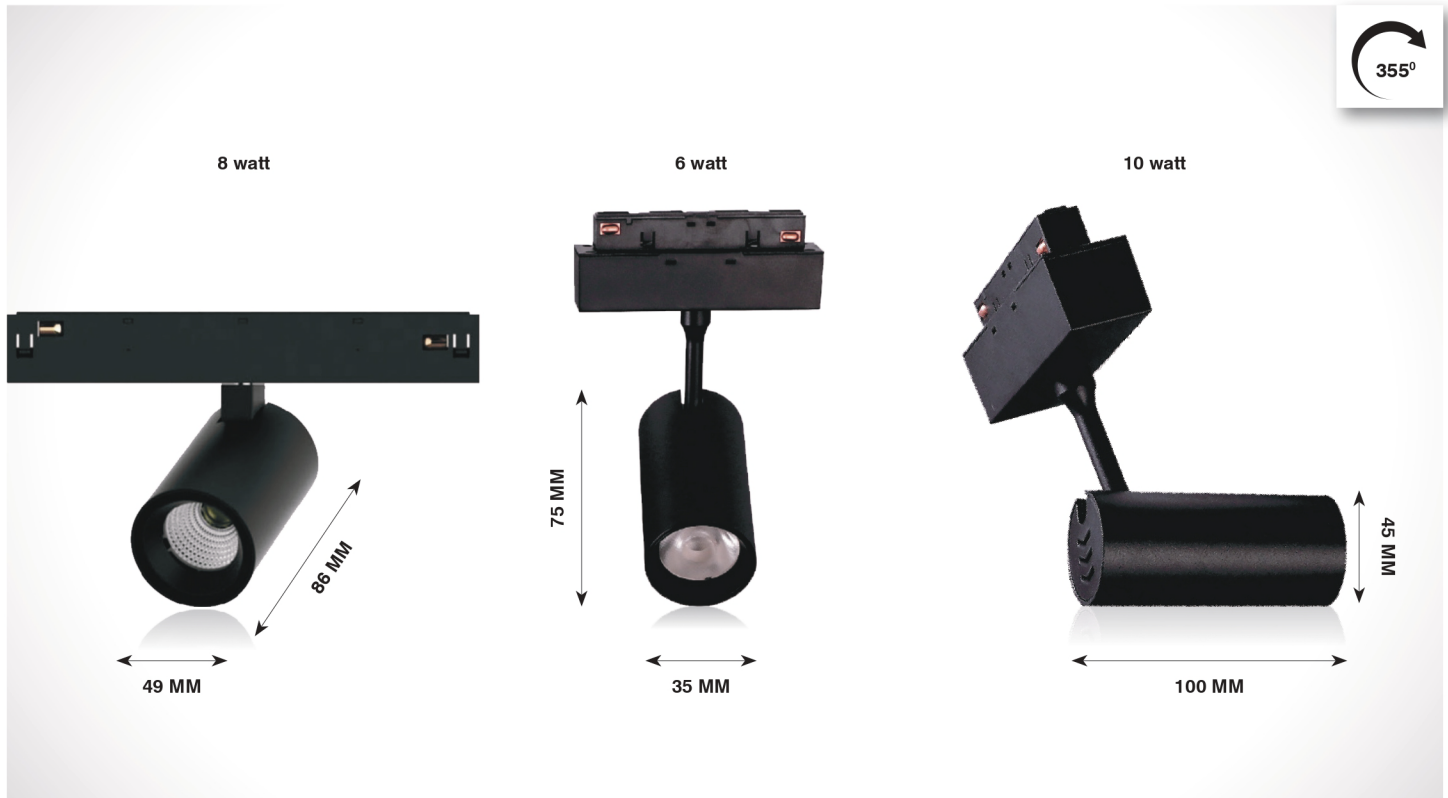


Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
SL-MTL-290-8w-R-W.WHT	80 / 90	3000K	Length	Diameter	880 lm	48V DC	Housing	Aluminium
SL-MTL-290-8w-R-N.WHT		4000K	86	49	960 lm		LED Make	Cree / Bridgelux
SL-MTL-290-8w-R-WHT		6500K			1000 lm			

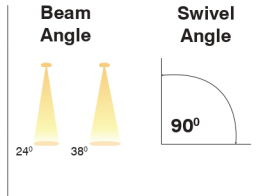

Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
SL-MTL-293-6w-R-W.WHT	80 / 90	3000K	Length	Diameter	660 lm	48V DC	Housing	Aluminium
SL-MTL-293-6w-R-N.WHT		4000K	75	35	720 lm		LED Make	Cree / Bridgelux
SL-MTL-293-6w-R-WHT		6500K			750 lm			

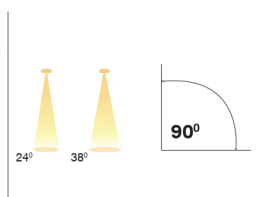

Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
SL-MTL-293-10w-R-W.WHT	80 / 90	3000K	Length	Diameter	1100 lm	48V DC	Housing	Aluminium
SL-MTL-293-10w-R-N.WHT		4000K	100	45	1200 lm		LED Make	Cree / Bridgelux
SL-MTL-293-10w-R-WHT		6500K			1250 lm			

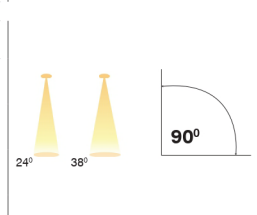

MAGNETIC TRACK ACCESSORIES

Recessed



SL-MTC-298 - L Connector



SL-MTC-299 - T Connector



SL-MTC-300 - I Connector

Power Connector



SL-MPC - 304




SL-MPSC - 305
Power Series Connector



Non Dimmable Power
Supply - Meanwell
(48v Dc)

Surface



SL-MSTC-301 - L Connector



SL-MSTC-302 - T Connector



SL-MSTC-303 - I Connector